


FLAT COVER  
SPECIAL COMPOUND  
TYPE SMOOTH APL

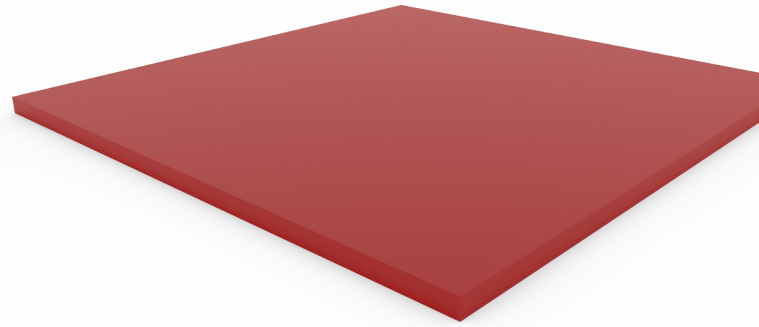

Our coatings and covers can be produced with several materials and can be applied to the timing belts for obtaining specific properties required (higher friction coefficient, higher abrasion resistance, higher oil resistance...).

Material: **SPEC. COMPOUND**  
 Hardness: **SH 55 A**  
 Colour: **RED**  
 Method: **BY EXTRUSION**  
 Tolerance: **+/- 3 SHA**

CODE	WIDTH MM (B)	THICKNESS MM (TOLERANCE + - 0,3 MM) (H)	WORKING TEMP. °C	FRICTION COEFF.	MIN. PULLEY Ø = THICKNESS	WATER RESISTANCE	ABRASION RESISTANCE	OIL RESISTANCE
95011501276A	100	3,5	-20 +60	0,70	X30	GOOD	GOOD	GOOD
95011501286A	100	6,5	-20 +60	0,70	X30	GOOD	GOOD	GOOD