
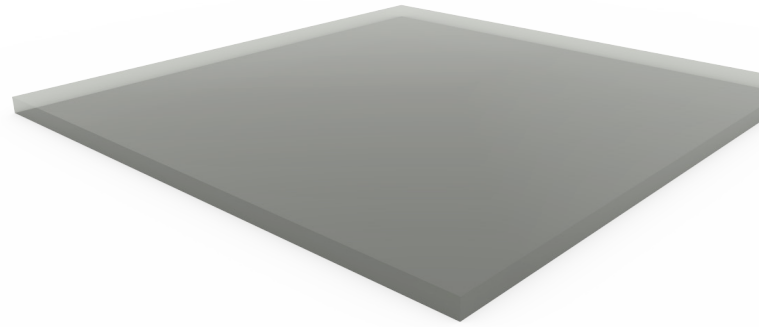


FLAT COVER  
TPU  
TYPE SMOOTH 



Our coatings and covers can be produced with several materials and can be applied to the timing belts for obtaining specific properties required (higher friction coefficient, higher abrasion resistance, higher oil resistance...).

Material: **PU**  
Hardness: **SH 60 A**  
Colour: **TRANSPARENT**  
Method: **BY EXTRUSION**  
Tolerance: **+/- 3 SHA**

CODE	WIDTH MM (B)	THICKNESS MM (TOLERANCE + - 0,3 MM) (H)	WORKING TEMP. °C	FRICTION COEFF.	MIN. PULLEY Ø = THICKNESS	WATER RESISTANCE	ABRASION RESISTANCE	OIL RESISTANCE
910115003878	100	2,0	-20 +80	0,65	X40	VERY GOOD	VERY GOOD	VERY GOOD
910115003978	100	3,0	-20 +80	0,65	X40	VERY GOOD	VERY GOOD	VERY GOOD
910115004078	100	4,0	-20 +80	0,65	X40	VERY GOOD	VERY GOOD	VERY GOOD