
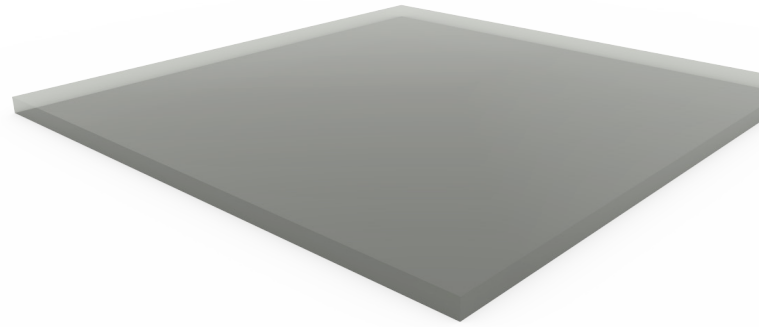


FLAT COVER  
TPU  
TYPE SMOOTH 



Our coatings and covers can be produced with several materials and can be applied to the timing belts for obtaining specific properties required (higher friction coefficient, higher abrasion resistance, higher oil resistance...).

Material:  
Hardness:  
Colour:  
Method:  
Tolerance:

**PU**  
**SH 70 A**  
**TRANSPARENT**  
**BY EXTRUSION**  
**+/- 3 SHA**

| CODE         | WIDTH<br>MM (B) | THICKNESS<br>MM<br>(TOLERANCE<br>+ - 0,3 MM) (H) | WORKING<br>TEMP. °C | FRICTION<br>COEFF. | MIN.<br>PULLEY Ø<br>= THICKNESS | WATER<br>RESISTANCE | ABRASION<br>RESISTANCE | OIL<br>RESISTANCE |
|--------------|-----------------|--|---------------------|--------------------|---------------------------------|---------------------|------------------------|-------------------|
| 910115003871 | 100             | 2,0  | -20 +80             | 0,65               | X40                             | VERY GOOD           | VERY GOOD              | VERY GOOD         |
| 910115003971 | 100             | 3,0  | -20 +80             | 0,65               | X40                             | VERY GOOD           | VERY GOOD              | VERY GOOD         |
| 910115004071 | 100             | 4,0  | -20 +80             | 0,65               | X40                             | VERY GOOD           | VERY GOOD              | VERY GOOD         |